Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

TYPE TS SLIDE SWITCH

SPECIFICATIONS

CONTACT RATING—6 amps with resistive load @ 120VAC or 28VDC. 2 amps with resistive load @ 250VAC.
ELECTRICAL LIFE—30,000 actuations at full load
CONTACT RESISTANCE—10 milliohms max. initialy.
INSULATION RESISTANCE— 100 megohms minimum.
DIELECTRIC STRENGTH—1,000 volts RMS @ sea level.
OPERATING TEMPERATURE— -20°C to 65°C

MATERIALS

CASE—Diallyl phthalate (DAP)
HOUSING—Stainless Steel
SLIDE HANDLE—Nylon.
CONTACTS—Coin silver, silver plated.
CENTER CONTACT & TERMINAL—Brass, silver plated.

Jameco Part Number 202948

Series TS10

6A 120VAC or 28VDC, 3A 250VAC

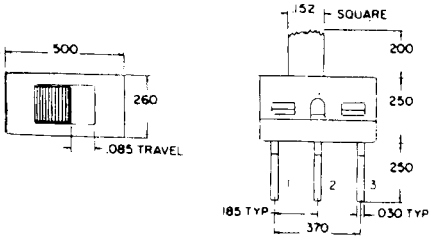

Model No.	SWITCHING FUNCTION		
TS-13C	ON	NONE	ON
TS-14C	ON	OFF	ON
TS-15C	(ON)	NONE	ON
Term CONN	2--1	OPEN	2—3

Schematic



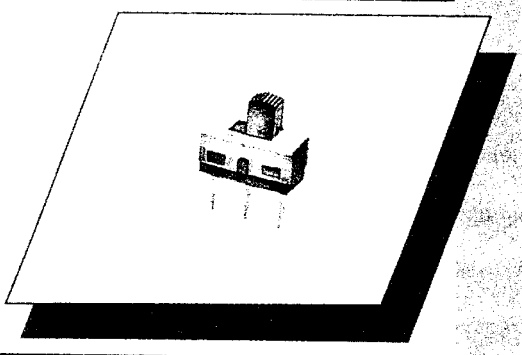

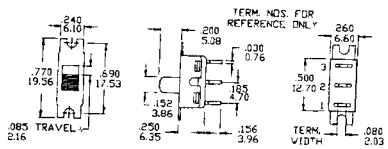

Model No.	Switching position		
TS-13 (3P)	ON	NONE	ON
Term Comm	2-1	OPEN	2-3
TS-11 (6P)	ON	NONE	ON
Term CONN	2-1, 5-4	OPEN	2-3, 5-6

Schematic



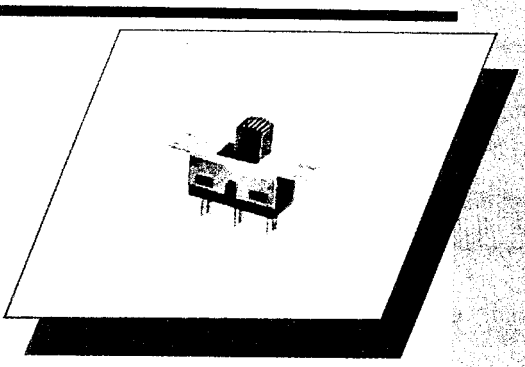



Model No.	Switching Position		
TS-13P (3P)	ON	NONE	ON
Term Comm	2-1	OPEN	2-3
TS-11P (6P)	ON	NONE	ON
Term CONN	2-1, 5-4	OPEN	2-3, 5-6

Schematic



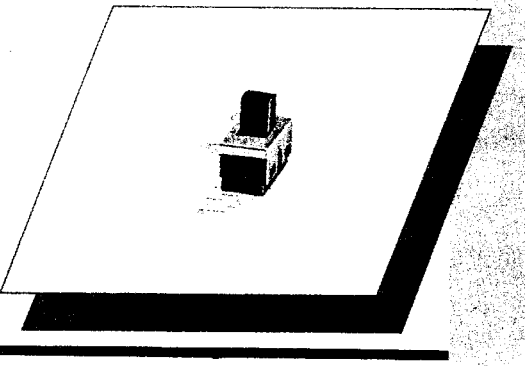

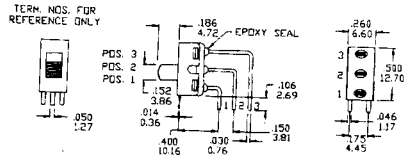

Model No.	Switching Position		
TS-13L (3P)	ON	NONE	ON
Term Comm	2-1	OPEN	2-3
TS-11L (6P)	ON	NONE	ON
Term CONN	2-1, 5-4	OPEN	2-3, 5-6

Schematic